


RD Series

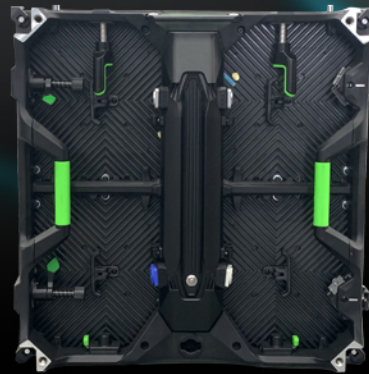

Part Number	RD1.9/2.5	RD2/3	RD(O)3	RD(O)4
Pixel pitch	1.9/2.5mm	2.8/3.9mm	3.9mm	4.8mm
LED type	SMD1515(Black)	SMD2020(Black)	SMD1921(Black)	SMD1921(White)
Pixel configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Size of module	250mmx250mm	250mmx250mm	250mmx250mm	250mmx250mm
Resolution of module	128x128/100x100	88x88/64x64	64x64	52x52
Density(dots/m ²)	262144/160000	123904/65536	65536	43264
Size of cabinet (mm)	500x500	500x500,500x1000	500x500,500x1000	500x500,500x1000
Cabinet material	Die-casting	Die-casting	Die-casting	Die-casting
Weight of cabinet	8.6KG	8.6KG,16KG	8.6KG,16KG	8.6KG,16KG
Support hanging or not	Yes	Yes	Yes	Yes
Max power consumption	600W/M ²	600W/M ²	750W/M ²	750W/M ²
Average power consumption	200W/M ²	200W/M ²	250W/M ²	250W/M ²
Colors	16.7M	16.7M	16.7M	16.7M
Gray scale	16bits	16bits	14bits	14bits
Color temperature	3000-10000K	3000-10000K	3000-10000K	3000-10000K
Driving method	1/32, 1/25	1/22, 1/16	1/8	1/9
Refresh frequency	≥3000Hz	≥3000Hz	≥1920Hz	≥1920Hz
Brightness	800cd/m ²	900cd/m ²	3500/4500cd/m ²	5000cd/m ²
Brightness control	256 grade	256 grade	256 grade	256 grade
IP grade	IP30	IP30	IP65	IP65